

# LIMO45-F400-DL808-S3001

High Power Diode Laser



## Your product benefits:

- Plug and play fiber connector
- High e/o efficiency
- Hermetically sealed housing
- 100% emitter and fiber incoming inspection
- 100% laser outgoing inspection

| Photonics Solutions |

LIMO laser and optics designed and engineered in Germany

Laser Module	Unit	Value	Unit	Value
--------------	------	-------	------	-------

### Optical Data

CW - nominal output power	W	45
Center wavelength	nm	808
Wavelength tolerance (±)	nm	3
Spectral width (FWHM)	nm	4
Wavelength temperature drift	nm/K	0,3

### Fiber Connection Data

Fiber core diameter	μm	400
Numerical aperture		0,22
Fiber - optic connector		SMA
Cladding mode (max)	%	not specified

### Thermal Operation Conditions

Nominal diode heat sink temperature	°C	20
Diode heat sink operation temperature	°C	+15...30
Minimum heat sink capacity	W	80

### Package

Dimensions	mm <sup>3</sup>	110x56x34
Weight basic package	kg	0,85
Storage temperature	°C	-20...+60

### Electrical Data

Max. operation current start of life	A	60
Max. operation current end of life	A	72
Typical threshold current	A	8
Typical operation voltage	V	2
Typical slope	W/A	1,0
Typical O/E efficiency	%	45

Additional Features	Unit	Value	Unit	Value
---------------------	------	-------	------	-------

### Pilot Beam

Output power (min)	mW	Not available
Wavelength	nm	Not available
Voltage	V	Not available
Current (max)	mA	Not available

### Monitor Diode

Operation voltage	V	Not available
Output signal (min)	V	Not available
Output signal (max)	V	Not available

### Fiber Detection Sensor (PNP)

Voltage	V	Not available
Current (max)	mA	Not available

### Other Features


Temperature sensors	NTC & PT100
Wavelength stabilization	Not available

### Protection Filter

High reflection bandwidth ( >99.0% s+p pol.)	nm	1030...1130
---	----	-------------

# LIMO45-F400-DL808-S3001

High Power Diode Laser

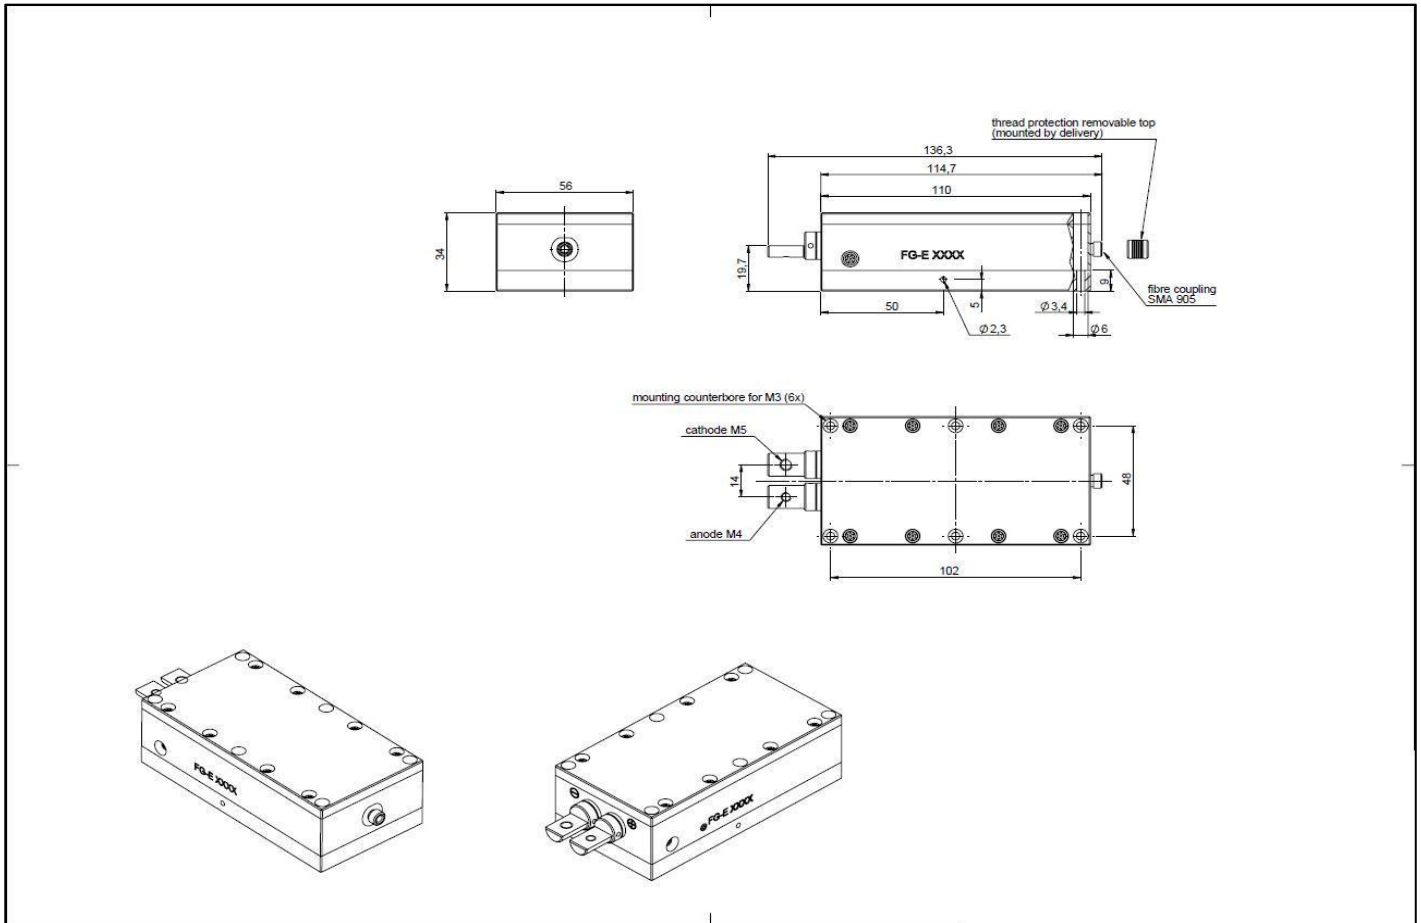

LIMO45-F400-DL808-S3001 prepared for thermoelectric cooling

All data provided are typically measured with a diode heat sink temperature of 20 °C. All measurements are made with a LIMO reference fiber 400 µm, length 1.5 m, and non AR coated.

Copyright © 2017 LIMO GmbH. All rights reserved. All LIMO products are patent pending. Subject to change without notice.

Version December 20, 2017