

# Fiber Coupler

Product number: ZLE000382



## General Description:

## | Advanced Optical Solutions |


Fiber coupler for the efficient coupling of a packaged broad area emitter into an optical fiber. Large working distance allows combination with many cans or other packages without removal of the cap or window.

## Specification Data

	Unit	Value
Material		S-TIH53 (Ohara)
Length (L)	mm	2.4 ± 0.05
Width (W)	mm	2.4 ± 0.05
Thickness (T)	mm	3.0 ± 0.02
Clear aperture	mm <sup>2</sup>	1.1 x 1.1
Surface quality @ 633 nm		λ/4 (typically)
Max. numerical aperture (NA)		FA: 0.46 SA: 0.1
Distance emitter facet - coupler (WD <sub>d</sub> )	mm	1.35
Distance coupler - fiber (WD <sub>f</sub> )	mm	3.1
Refractive index n @ 808 nm		1.823
Effective focal length (EFL) @ 808 nm	mm	FA: 1.04 SA: 1.57
Standard coating - AR	nm	790 - 990
Transmission	%	> 99
Typical coupling efficiencies (for AR coated fibers)		
Emitter 100 μm, NA 0.1; Fibre φ = 200 μm, NA 0.22	%	> 85
Emitter 200 μm, NA 0.1; Fibre φ = 200 μm, NA 0.22	%	> 80

## Options

Customized coating

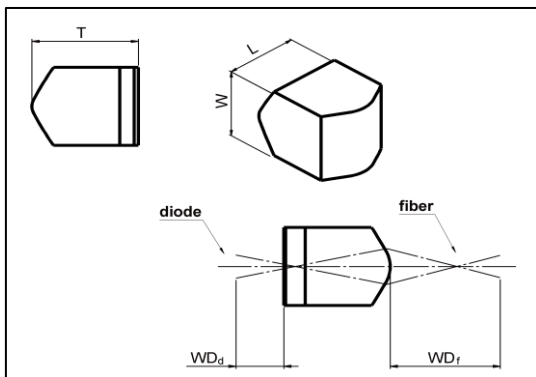

**RoHS compliant**  
2002/95/EG

Copyright © 2011 LIMO GmbH. All rights reserved. All LIMO products are patent pending. Subject to change without notice.

Version December 19, 2017