

LIMO32-F400-DL808-EX2024

High Power Diode Laser



product similar to image

Your product benefits:

- Plug and play fiber connector
- High e/o efficiency
- Hermetically sealed housing
- 100% emitter and fiber incoming inspection
- 100% laser outgoing inspection


| Photonics Solutions |

LIMO laser and optics designed and engineered in Germany

Laser Module	Unit	Value	Unit	Value
Optical Data		Fiber Connection Data		
CW - nominal output power	W	32	Fiber core diameter	μm 400
Center wavelength	nm	808	Numerical aperture	0,22
Wavelength tolerance (±)	nm	3	Fiber - optic connector	SMA
Spectral width (FWHM)	nm	4	Cladding mode (max)	% not specified
Wavelength temperature drift	nm/K	0,3		
Thermal Operation Conditions		Package		
Nominal diode heat sink temperature	°C	25	Dimensions	mm ³ 109x25x20
Diode heat sink operation temperature	°C	+15...30	Weight basic package	kg 0,3
Minimum heat sink capacity	W	60	Storage temperature	°C -20...+60
Electrical Data				
Max. operation current start of life	A	43		
Max. operation current end of life	A	52		
Typical threshold current	A	8		
Typical operation voltage	V	2		
Typical slope	W/A	0,9		
Typical O/E efficiency	%	44		
Additional Features		Monitor Diode		
Pilot Beam				
Output power (min)	mW	Not available	Operation voltage	V Not available
Wavelength	nm	Not available	Output signal (min)	V Not available
Voltage	V	Not available	Output signal (max)	V Not available
Current (max)	mA	Not available		
Fiber Detection Sensor (PNP)		Other Features		
Voltage	V	Not available	Temperature sensors	NTC & PT100
Current (max)	mA	Not available	Wavelength stabilization	Not available
Protection Filter				
High reflection bandwidth (>99.0% s+p pol.)	nm	1030...1130		

LIMO32-F400-DL808-EX2024

High Power Diode Laser

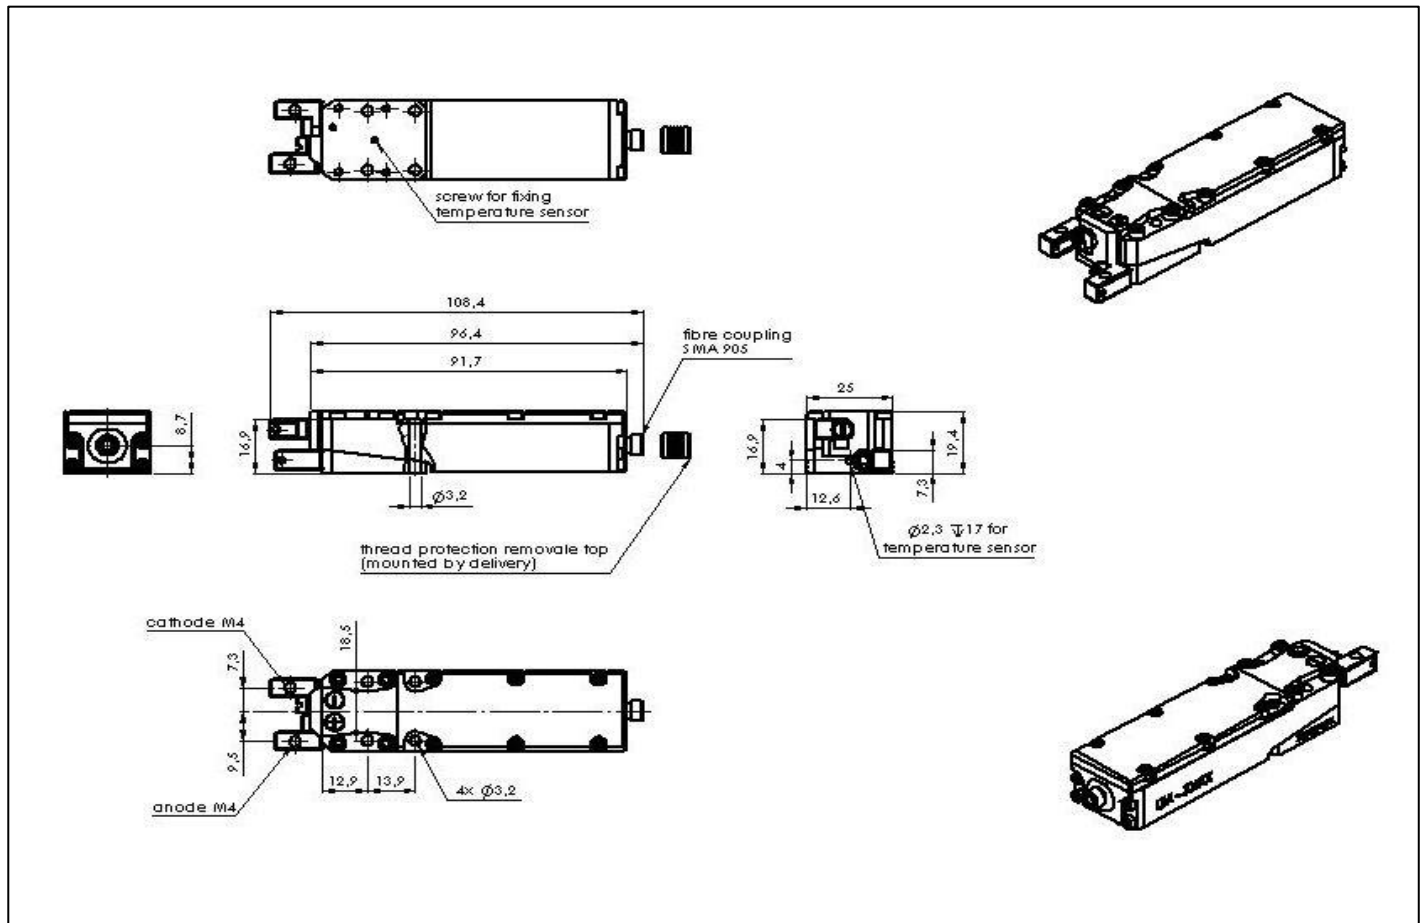

LIMO32-F400-DL808-EX2024 prepared for thermoelectric cooling

All data provided are typically measured with a diode heat sink temperature of 25 °C. All measurements are made with a LIMO reference fiber 400 µm, length 1.5 m, and non AR coated.

Copyright © 2017 LIMO GmbH. All rights reserved. All LIMO products are patent pending. Subject to change without notice.

Version December 20, 2017